

United
States
of
America



To Promote the Progress



of Science and Useful Arts

The Director

of the United States Patent and Trademark Office has received an application for a patent for a new and useful invention. The title and description of the invention are enclosed. The requirements of law have been complied with, and it has been determined that a patent on the invention shall be granted under the law.

Therefore, this United States

Patent

grants to the person(s) having title to this patent the right to exclude others from making, using, offering for sale, or selling the invention throughout the United States of America or importing the invention into the United States of America, and if the invention is a process, of the right to exclude others from using, offering for sale or selling throughout the United States of America, products made by that process, for the term set forth in 35 U.S.C. 154(a)(2) or (c)(1), subject to the payment of maintenance fees as provided by 35 U.S.C. 41(b). See the Maintenance Fee Notice on the inside of the cover.

Cole Morgan Smead

ACTING DIRECTOR OF THE UNITED STATES PATENT AND TRADEMARK OFFICE

Maintenance Fee Notice

If the application for this patent was filed on or after December 12, 1980, maintenance fees are due three years and six months, seven years and six months, and eleven years and six months after the date of this grant, or within a grace period of six months thereafter upon payment of a surcharge as provided by law. The amount, number and timing of the maintenance fees required may be changed by law or regulation. Unless payment of the applicable maintenance fee is received in the United States Patent and Trademark Office on or before the date the fee is due or within a grace period of six months thereafter, the patent will expire as of the end of such grace period.

Patent Term Notice

If the application for this patent was filed on or after June 8, 1995, the term of this patent begins on the date on which this patent issues and ends twenty years from the filing date of the application or, if the application contains a specific reference to an earlier filed application or applications under 35 U.S.C. 120, 121, 365(c), or 386(c), twenty years from the filing date of the earliest such application (“the twenty-year term”), subject to the payment of maintenance fees as provided by 35 U.S.C. 41(b), and any extension as provided by 35 U.S.C. 154(b) or 156 or any disclaimer under 35 U.S.C. 253.

If this application was filed prior to June 8, 1995, the term of this patent begins on the date on which this patent issues and ends on the later of seventeen years from the date of the grant of this patent or the twenty-year term set forth above for patents resulting from applications filed on or after June 8, 1995, subject to the payment of maintenance fees as provided by 35 U.S.C. 41(b) and any extension as provided by 35 U.S.C. 156 or any disclaimer under 35 U.S.C. 253.



US012202383B2

(12) **United States Patent**
Sajovic

(10) **Patent No.:** **US 12,202,383 B2**

(45) **Date of Patent:** ***Jan. 21, 2025**

(54) **VEHICULAR CHILD MONITORING SYSTEM**

(71) Applicant: **Jason Edward Sajovic**, Apopka, FL (US)

(72) Inventor: **Jason Edward Sajovic**, Apopka, FL (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **17/990,466**

(22) Filed: **Nov. 18, 2022**

(65) **Prior Publication Data**

US 2023/0078229 A1 Mar. 16, 2023

Related U.S. Application Data

(63) Continuation of application No. 17/152,493, filed on Jan. 19, 2021, now Pat. No. 11,535,123.

(51) **Int. Cl.**

B60Q 1/00 (2006.01)
B60N 2/00 (2006.01)
B60N 2/26 (2006.01)
G06V 20/59 (2022.01)
G08B 21/02 (2006.01)
G08B 21/22 (2006.01)
G08B 21/24 (2006.01)

(52) **U.S. Cl.**

CPC **B60N 2/002** (2013.01); **B60N 2/26** (2013.01); **G06V 20/593** (2022.01); **G08B 21/0247** (2013.01); **G08B 21/0255** (2013.01); **G08B 21/0277** (2013.01); **G08B 21/22** (2013.01); **G08B 21/24** (2013.01)

(58) **Field of Classification Search**

CPC B60N 2/002; B60N 2/26; G06V 20/593; G08B 21/0247; G08B 21/0255; G08B 21/0277; G08B 21/22; G08B 21/24; G08B 21/0208; B60R 1/29
USPC 340/457, 573.1, 573.4, 521, 686.6
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

11,535,123 B2 * 12/2022 Sajovic G06V 20/593
2009/0174774 A1 7/2009 Kinsley
2013/0049955 A1 2/2013 Hoover et al.
2014/0118548 A1 5/2014 Veneziano et al.
2016/0379459 A1 12/2016 Trang et al.

(Continued)


Primary Examiner — Anh V La

(74) *Attorney, Agent, or Firm* — Jason T. Daniel, Esq.; Daniel Law Offices, P.A.

(57) **ABSTRACT**

A vehicular child monitoring system includes a child monitoring device having a connector for securing the device within a motor vehicle and oriented toward a child seat. The device includes a mirror, a seat connector, a camera, and a control system having a wireless communication unit and a plurality of sensors. The sensors include a temperature sensor, a humidity sensor, a proximity sensor, and a child detection sensor. A child monitoring application is communicatively linked to the communication unit and includes functionality for displaying the information received from the camera and each of the sensors, and for determining a separation distance with the child monitoring device. The system including functionality for determining that a child is in the car seat and sending an alarm to an external device if the vehicle temperature is above a set threshold.

19 Claims, 4 Drawing Sheets

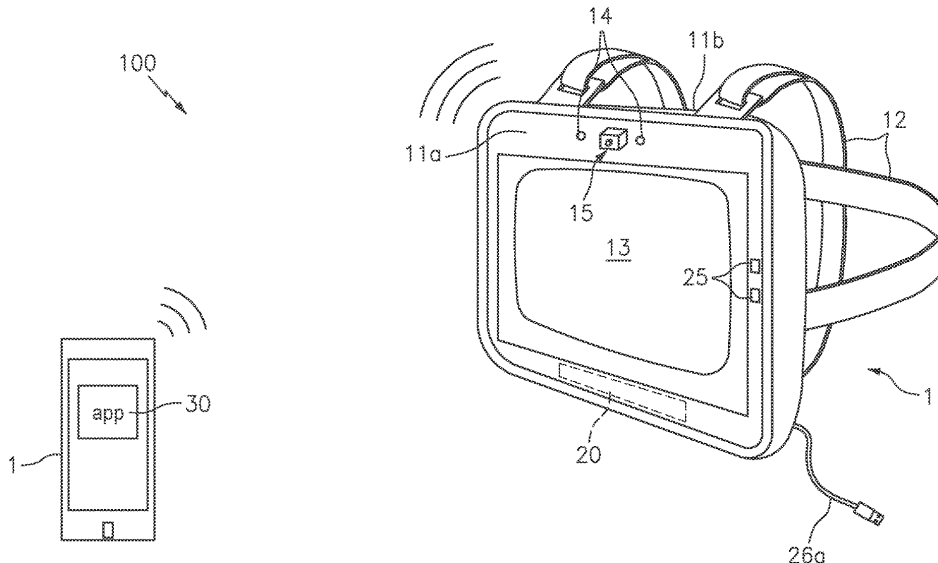

(56)

References Cited

U.S. PATENT DOCUMENTS

2017/0109987	A1	4/2017	Auvenshine et al.	
2018/0065504	A1*	3/2018	Lan	B60W 10/30
2020/0193792	A1	6/2020	Mao	
2021/0046898	A1	2/2021	Walker et al.	
2021/0142644	A1*	5/2021	Balakrishnan	G08B 21/0492

* cited by examiner

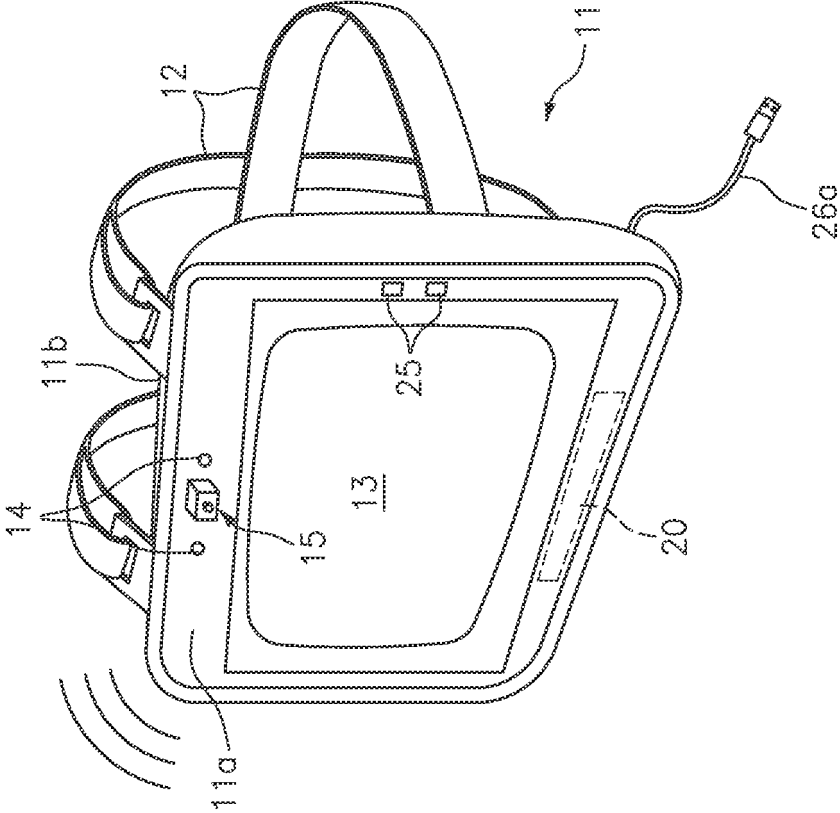
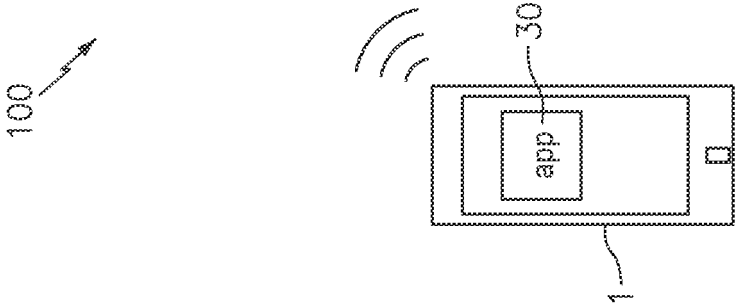


FIG. 1



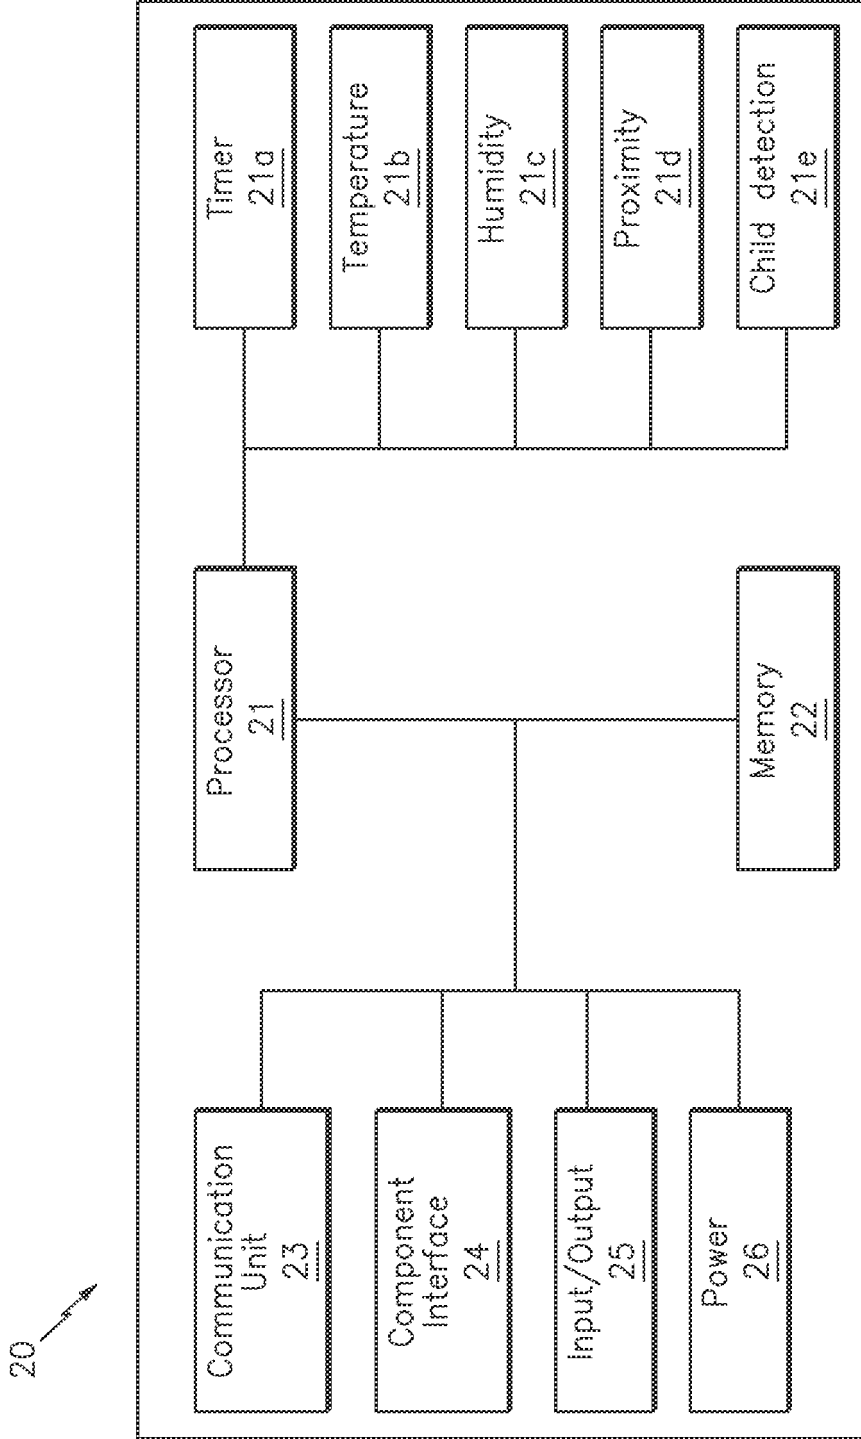


FIG. 2

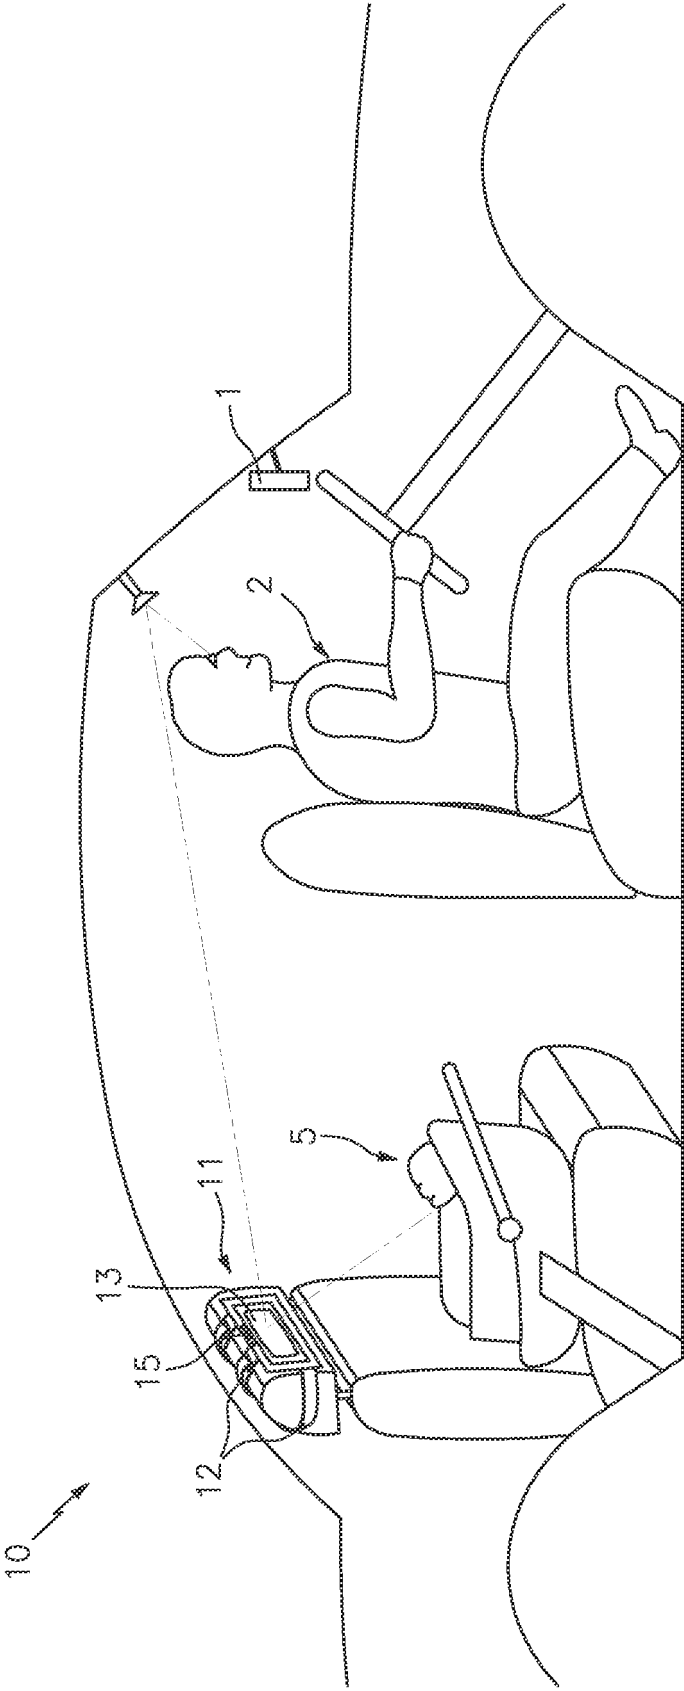


FIG. 3A

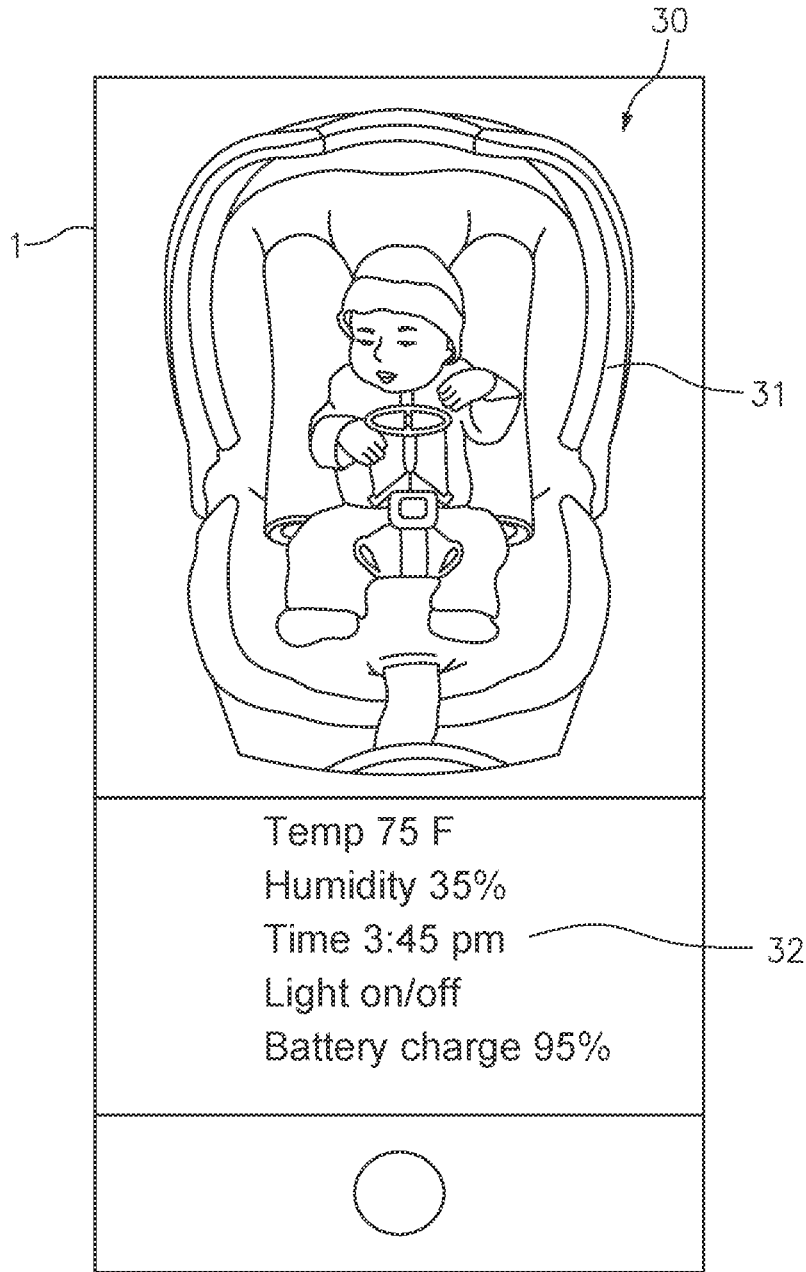


FIG. 3B

1

VEHICULAR CHILD MONITORING SYSTEM

CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims the benefit of U.S. application Ser. No. 17/152,493 filed on Jan. 19, 2021, the contents of which are incorporated herein by reference.

TECHNICAL FIELD

The present invention relates generally to child safety products, and more particularly to a device and system for monitoring the presence of a child in a vehicle.

BACKGROUND

The statements in this section merely provide background information related to the present disclosure and may not constitute prior art.

As any parent will attest, there is nothing more important than the safety of a child. Unfortunately, thousands of children are unintentionally left within parked vehicles each year by parents or other caregivers after arriving at a destination. These instances have resulted in serious injuries and numerous child deaths caused by the effects of prolonged exposure to extreme temperatures within the parked vehicle. In the vast majority of such instances, the caregiver (who is often a new parent) simply forgot that the child was in the vehicle.

Although there are many commercially available child seats such as infant carriers and booster seats, for example, these items are specifically designed to meet or exceed safety standards so as to give a child the best possible chance of surviving a crash. As a result, they often surround the child, making it difficult for the caregiver to physically see the child in their seat. Unfortunately, such seats do nothing to prevent a child from being left in the vehicle after arriving at a destination.

Accordingly, it would be beneficial to provide a vehicular child monitoring device that can allow a caregiver to quickly and easily see a child riding in their vehicle at all times. It would also be beneficial if the device can provide an alert/alarm in the instance the caregiver leaves the child unattended within the vehicle.

SUMMARY OF THE INVENTION

The present invention is directed to a vehicular child monitoring system. One embodiment of the present invention can include a child monitoring device that is positioned within a motor vehicle and oriented toward a child seat. The device can include a mirror, a seat connector, a camera, and a control system having a wireless communication unit and a plurality of sensors. The sensors can include a temperature sensor, a humidity sensor, a proximity sensor, and a child detection sensor.

In one embodiment, data from the camera and each of the sensors can be transmitted to an external device that is running a child monitoring application. The application including functionality for displaying the information received from the camera and each of the sensors, and for determining a separation distance with the child monitoring device.

In one embodiment, the system can initiate an alarm protocol upon determining that a child is in the car seat, and

2

that the separation distance is beyond a predetermined threshold. The alarm protocol can send an alert to a third party and can include the location where the child is located. The alarm protocol can also be initiated automatically if the temperature sensor detects the vehicle temperature is beyond a set threshold and that the child is within the vehicle.

This summary is provided merely to introduce certain concepts and not to identify key or essential features of the claimed subject matter.

BRIEF DESCRIPTION OF THE DRAWINGS

Presently preferred embodiments are shown in the drawings. It should be appreciated, however, that the invention is not limited to the precise arrangements and instrumentalities shown.

FIG. 1 is a perspective view of a vehicular child monitoring system, in accordance with one embodiment of the invention.

FIG. 2 is a simplified block diagram of the internal control system of the vehicular child monitoring device, in accordance with one embodiment of the invention.

FIG. 3A is a perspective view of the vehicular child monitoring system in operation, in accordance with one embodiment of the invention.

FIG. 3B is an exemplary presentation screen generated by the child monitoring application, in accordance with one embodiment of the invention.

DETAILED DESCRIPTION OF THE INVENTION

While the specification concludes with claims defining the features of the invention that are regarded as novel, it is believed that the invention will be better understood from a consideration of the description in conjunction with the drawings. As required, detailed embodiments of the present invention are disclosed herein; however, it is to be understood that the disclosed embodiments are merely exemplary of the invention which can be embodied in various forms. Therefore, specific structural and functional details disclosed herein are not to be interpreted as limiting, but merely as a basis for the claims and as a representative basis for teaching one skilled in the art to variously employ the inventive arrangements in virtually any appropriately detailed structure. Further, the terms and phrases used herein are not intended to be limiting but rather to provide an understandable description of the invention.

Definitions

As described herein, a “unit” means a series of identified physical components which are linked together and/or function together to perform a specified function.

As described herein, the term “connector” includes any number of different elements that work together to repeatedly join two items together in a nonpermanent manner. Several nonlimiting examples include opposing strips of hook and loop material (i.e., Velcro®), attractively-oriented magnetic elements, flexible strips of interlocking projections with a slider (i.e., zipper), tethers, buckles such as side release buckles, and compression fittings such as T-handle rubber draw latches, hooks, snaps and buttons, for example. Each illustrated connector and complementary connector can be permanently secured to the illustrated portion of the device via a permanent sealer such as glue, adhesive tape, or stitching, for example.

FIGS. 1-3B illustrate one embodiment of a vehicular child monitoring system **10** that is useful for understanding the inventive concepts disclosed herein. In each of the drawings, identical reference numerals are used for like elements of the invention or elements of like function. For the sake of clarity, only those reference numerals are shown in the individual figures which are necessary for the description of the respective figure. For purposes of this description, the terms "upper," "bottom," "right," "left," "front," "vertical," "horizontal," and derivatives thereof shall relate to the invention as oriented in FIG. 1.

As shown in FIG. 1, one embodiment of the system **10** can include, essentially, a child monitoring device **11** having an internally located control system **20** that is in communication with a user interface **1** running an application **30**.

In one embodiment, the child monitoring device can include a main body **11** having front surface **11a**, a back surface **11b** and a plurality of side surfaces that define an interior space. In one embodiment, the main body can include the illustrated rectangular shape, and can be constructed from plastic having a foam cover.

Although not specifically illustrated, the main body may include or be adorned with any number of decorative elements such as various drawings, logos, words and/or colors, for example, which can be provided to make the unit attractive for parents and children. Of course, other embodiments are contemplated wherein the main body can be constructed so as to include any number of different shapes and sizes and can be constructed from a wide variety of different materials than those described above.

In one embodiment, a seat connector **12** can be disposed along the back surface of the main body **11**. In the illustrated embodiment, the seat connector can include a plurality of adjustable straps for allowing the main body to be removably secured onto a headrest of a vehicle seat. Of course, any number of other connectors capable of securing the main body at any location along or within a vehicle are also contemplated.

In one embodiment, a mirror **13** can be removably secured onto the main body **11** via one or more connectors. In the preferred embodiment, the mirror will be constructed from a shatter proof material such as acrylic or polished metal, for example. The mirror can also include a wide variety of different shapes and sizes and can also include different magnification levels.

In one embodiment, one or more lights **14** can be provided along the main body. The light can be communicatively linked to the control system **20** and can function to selectively illuminate the mirror **13** and/or a child to which the main body is oriented. In the preferred embodiment, the light can comprise a low voltage light emitting diode; however, any number of other types of lighting elements are contemplated.

In one embodiment, a camera **15** can be positioned along the main body **11**. As described herein, the camera **15** can include any type of image capture device capable of capturing still or moving images in any one of the visible, near-infrared, or any appropriate spectrum. The camera may include an integrated microphone, so as to capture audiovisual information which can be transmitted to the control system for storage within the memory and/or transmission by the transceiver.

FIG. 2 illustrates one embodiment of the control system **20** for the system **10**. As shown, the control system can include a processor **21** that is conventionally connected to an

internal memory **22**, a communication unit **23**, a component interface unit **24** an input/output unit **25**, and/or a power source **26**.

Although illustrated as separate elements, those of skill in the art will recognize that one or more system components may comprise or include one or more printed circuit boards (PCB) containing any number of integrated circuit or circuits for completing the activities described herein. Of course, any number of other analog and/or digital components capable of performing the below described functionality can be provided in place of, or in conjunction with the below described control system elements.

The processing unit **21** can be a conventional central processing unit (CPU) or any other type of device, or multiple devices, capable of manipulating or processing information such as program code stored in the memory **22** and for causing the circuitry to complete the activities and functionality described herein.

In various embodiments, a sensor suite having one or more sensors can be provided as discrete elements or as a part of the control system. Several such sensors may include, for example, a timer **21a**, a temperature sensor **21b**, a humidity sensor **21c**, a proximity sensor **21d**, and a child detection sensor **21e** among others for example. As described herein, each of these sensors can be provided as a function of the processor or can include a separate physical circuit.

With specific regard to the proximity sensor **21d**, this component can preferably function to continuously detect and report the strength and time intervals of the signals passed between the device **11** and a mobile device **1** running the below described App **30**, in order to calculate a separation distance of the components.

As described herein, the child detection sensor **21e** can include any number of different devices capable of detecting the presence of a child. In one embodiment, the sensor can include an infrared motion sensor which can detect movement within a 180-degree area. In another embodiment, the memory may be provided with instructions to utilize images captured by the camera to perform facial or spatial recognition.

Memory **22** can act to store operating instructions in the form of program code for the processor **21** to execute. Although illustrated in FIG. 2 as a single component, memory **22** can include one or more physical memory devices such as, for example, local memory and/or one or more bulk storage devices. To this end, the control system memory can also function to receive and store audiovisual information from the camera **15**.

The communication unit **23** can include any number of components capable of sending and/or receiving electronic signals with an externally located device, either directly or over a network. In one embodiment, the communication unit can include a WiFi transceiver for communicating wirelessly with an external device **1** such as a smartphone, computer and/or tablet device running a mobile application. Such a feature allowing a user within the vehicle to continuously view information captured by the camera and other sensors.

In the preferred embodiment, the system **10** can include a child monitoring application (i.e., App) **30** which can be loaded onto the portable electronic device **1**. Of course, the inventive concepts disclosed herein are not to be construed as limiting to a smartphone App, as virtually any type of instruction sets, in any form of programming language that can be executed on a processor enabled device are also contemplated.

5

In one embodiment, the communication unit **23** can include a cellular transceiver capable of sending and receiving voice and/or data transmissions over a cellular network. Such a feature allowing the system to perform each of the above noted tasks, and to also directly notify third parties by voice, text or data transmission, in the event the system detects the child is left unoccupied within a vehicle. Of course, the communication unit is not limited to the above, as any number of other known transmission and reception mechanisms and protocols can also be utilized herein, several nonlimiting examples include Near-Field-Communication (NFC) devices, unique radio frequencies and/or a network adapter functioning to communicate over a WAN, LAN or the internet via an internet service provider.

The internal component interface unit **24** can function to provide a communicative link between the processor **21** and various other device components such as the camera **15**, lights **14**, and/or onboard sensors (e.g., temperature sensor, humidity sensor and proximity sensor), for example. In this regard, the component interface unit can include any number of different components such as one or more PIC microcontrollers, internal bus, USB connections and other such hardware capable of providing a direct link between the various components. Of course, any other means for providing the two-way communication between various system components can also be utilized herein.

One or more input/output units, such as the push buttons **25** can act to accept user inputs and provide instructions to the processor. In one preferred embodiment, each of the button(s) can be connected to the processor **21** so as to activate different programmatic functions. For example, the push button can act to initiate programming for instructing the processor **21** to immediately activate the lights **14**. In another example, one of the buttons **25** can function to switch the electronic components of the device between an ON and OFF state, initiate a Sleep mode, and/or to pair the communication unit with an external device, and so on.

In the preferred embodiment, the power source **26** can include one or more DC batteries capable of providing the necessary power requirements to each element of the device **10**. In one embodiment, the batteries can be located within the main body and can be rechargeable in nature via a charging port/cord **26a**, such as a mini or micro-USB port, for example. Likewise, the charging cord can function to supply continuous power to the device if so desired. Of course, traditional batteries can also be utilized, and the main body can further include a battery compartment having a removable cover (not illustrated) for allowing a user to access the same.

FIGS. **3A** and **3B** illustrate one embodiment of the system **10** in operation. As shown, a user **2** can use the connectors **12** to position the device **11** along a vehicle seat such that the camera **15** and mirror **13** are pointed toward a child **2** in a car seat. Next, the user can activate the mobile app **30** on their device **1** and can use both the camera **15** and mirror **13** to continuously monitor the health and safety of a child within the seat.

In one embodiment, the App **30** can include program language for execution on the device **1** that enables an App user to send and/or receive information with the child monitoring device **11**. This information can include, for example, instructions to selectively activate the camera **15** and/or lights **14** of the device **11**. Additionally, the App **30** can include functionality for displaying the audiovisual information captured by the camera **15** in order to show a live image **31** of the child **1**, along with the sensor data **32**

6

such as the current temperature and humidity levels of the vehicle in which the child and device **11** are presently located.

In various embodiments, information sent from the device **11** can be transmitted directly to the device **1** for immediate viewing and/or storage by the device **1**'s local memory, or the information can be sent to a centralized server for storage in the cloud. In such a situation, additional authorized and verified users operating secondary devices with the App **30** installed thereon may be able to view the information as well. For example, both parents of the child can install the App **30** on their personal smartphone devices so as to be able to view the camera and sensor information when they are in the vehicle with the child and when the other parent is in the vehicle with the child.

Another operation of the system **100** can include the ability to initiate an alarm protocol when the system detects that the child may have been left unattended within the vehicle. In various embodiments, this can be accomplished by first detecting the presence of a child via the child detection sensor **21e**, and subsequently determining that the distance between the device **11** and the device **1** on which the App **30** is operating has exceeded a predetermined distance such as 15 feet, for example. Such a distance representing a high likelihood that the device holder has vacated the vehicle while the child remains with the vehicle.

In one embodiment, the proximity sensor **21e** can measure the signal strength of the received WiFi (or other signals) emanating from the device **1** on which the app **30** is located. For example, the communication unit **23** can be programmed to automatically transmit a connection signal to the app **30** or vice versa at specified intervals. Upon receiving the connection signal, the corresponding device **23** or **30** can be programmed to immediately send a response signal. When the response time to receive the response signal exceeds a calculated value amount or when the response signal strength is below a calculated value amount, the device **11** can determine that the user of the device **1** has exceeded the specified distance and is thus likely no longer in the vehicle.

Of course, the inventive concepts are not to be construed as limiting to the above noted means for determining the separation distance, as any number of other devices and methods can be utilized herein to make the determination. For example, if the communication unit **23** includes a cellular transceiver, separation distance between the device **11** and the user device **1** can be determined by using the cellular tower triangulation. Alternatively, or in addition to the above, the device can include a discrete location identification unit which can function to provide real time location information (e.g., address, GPS coordinates, etc.) of the device at all times. In one embodiment, the location unit can comprise a discrete GPS signal antenna, and transceiver for communicating with a third-party location tracking company that provides tracking and retrieval services for registered GPS enabled devices, for example.

In various embodiments, the alarm protocol may include initiating the speaker and lights of both the user device **1** and the child monitoring device **11** to immediately notify the device user and/or anyone nearby that a child has been left in the vehicle. In the event that the user of the device **1** does not respond, and/or in the event that the temperature within the vehicle is beyond a set threshold (e.g., 99° F.), or upon other occurrences, the system may also automatically place a call to a third party, such as a list of contacts and/or the authorities, for example. In such an embodiment, the communication unit can provide the location of the device **11**

7

using cellular triangulation and/or the location identification unit, so that first responders may be able to quickly identify the location of the child.

Although described above with regard to a user-operated device **1**, other embodiments of the system **10** are contemplated wherein the system may include a dedicated purpose-build device having the above-described communicative abilities and video screen. Additionally, the system **10** may include a vehicle communication module, such as a CAN module, in order to allow a vehicle operator to view the camera information on the vehicle display screen. In such an embodiment, the vehicle's headlights and horn may become activated upon initiation of the alarm protocol.

As described herein, one or more elements of the child monitoring device **11** can be secured together utilizing any number of known attachment means such as, for example, screws, glue, compression fittings and welds, among others. Moreover, although the above embodiments have been described as including separate individual elements, the inventive concepts disclosed herein are not so limiting. To this end, one of skill in the art will recognize that one or more individually identified elements may be formed together as one or more continuous elements, either through manufacturing processes, such as welding, casting, or molding, or through the use of a singular piece of material milled or machined with the aforementioned components forming identifiable sections thereof.

As to a further description of the manner and use of the present invention, the same should be apparent from the above description. Accordingly, no further discussion relating to the manner of usage and operation will be provided.

The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting of the invention. As used herein, the singular forms "a," "an," and "the" are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will be further understood that the terms "comprises" and/or "comprising," when used in this specification, specify the presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof. Likewise, the term "consisting" shall be used to describe only those components identified. In each instance where a device comprises certain elements, it will inherently consist of each of those identified elements as well.

The corresponding structures, materials, acts, and equivalents of all means or step plus function elements in the claims below are intended to include any structure, material, or act for performing the function in combination with other claimed elements as specifically claimed. The description of the present invention has been presented for purposes of illustration and description but is not intended to be exhaustive or limited to the invention in the form disclosed. Many modifications and variations will be apparent to those of ordinary skill in the art without departing from the scope and spirit of the invention. The embodiment was chosen and described in order to best explain the principles of the invention and the practical application, and to enable others of ordinary skill in the art to understand the invention for various embodiments with various modifications as are suited to the particular use contemplated.

The invention claimed is:

1. A vehicular child monitoring system, comprising:
a main body having a front surface, a back surface and an inside space;

8

a seat connector that is positioned along the back surface of the main body;
a camera that is positioned along the front surface of the main body;
a mirror that is positioned along the front surface of the main body at a location adjacent to the camera;
a child detection sensor that is positioned along the main body, said child detection sensor including functionality for detecting a presence of a child located in line with the front surface of the main body;
a temperature sensor that is positioned along the main body, said temperature sensor being configured to detect a temperature of a vehicle in which the main body is located; and
a control system that is positioned within the main body, said control system including a processor and a memory, and is communicatively linked to the camera, the child detection sensor and the temperature sensor, wherein the control system includes functionality for generating an alert upon receiving a notification from the child detection sensor that a child is in the vehicle and receiving a notification that a temperature in the vehicle is above a set threshold, and
wherein the control system includes a wireless transceiver for communicating the alert with an external device.
2. The system of claim **1**, wherein the control system includes functionality for determining a location of the main body.
3. The system of claim **2**, wherein the alert communicated to the external device includes the determined location.
4. The system of claim **3**, wherein the communication unit includes a cellular transceiver, and the memory is configured to receive a list of contacts from a user.
5. The system of claim **4**, wherein the list of contacts includes at least one of a telephone number or text message address, and wherein the external device comprises a device connected to one of the telephone number or text message address.
6. The system of claim **1** wherein the mirror is removably connected to the main body.
7. The system of claim **1**, further comprising:
a child monitoring application that includes machine readable instructions for execution on the external processor enabled device having a speaker, internet connectivity, and a display screen.
8. The system of claim **7**, wherein the external device comprises a device on which the child monitoring application is installed.
9. The system of claim **7**, wherein the child monitoring application includes functionality for selectively activating the camera of the child monitoring device.
10. The system of claim **9**, wherein the child monitoring application includes functionality for displaying audiovisual information captured by the camera on the display screen of the external processor enabled device.
11. The system of claim **7**, further comprising:
at least one light that is disposed along the main body of the child monitoring device.
12. The system of claim **11**, wherein the child monitoring application includes functionality for selectively activating each of the at least one light on the child monitoring device.
13. The system of claim **1**, wherein the control system includes:
a memory; and
a processor that is in communication with the memory and the wireless transceiver.

14. The system of claim **13**, wherein the memory is configured to receive and store audiovisual information captured by the camera.

15. The system of claim **1**, wherein the wireless transceiver includes at least one of a WiFi transceiver or a Bluetooth transceiver. 5

16. The system of claim **15**, further comprising:

a proximity sensor that is configured to measure a strength of a signal received from the wireless communication unit; and 10

a child monitoring application that includes machine readable instructions for execution on the external processor enabled device having a speaker, internet connectivity, and a display screen.

17. The system of claim **16**, wherein the signal strength of the received signal is calculated to determine a separation distance between the child monitoring device and the external processor enabled device running the child monitoring application. 15

18. The system of claim **17**, wherein the control system includes functionality for initiating an alarm protocol when the separation distance between the child monitoring device and the external processor enabled device running the child monitoring application is beyond a predetermined threshold. 20

19. The system of claim **18**, wherein the alarm protocol includes activating a speaker of the external processor enabled device. 25

* * * * *